

**STANDARDS OF CONSTRUCTION
SPECIFICATION**



All canopies are powder coated, resistant to weather conditions, dampen with sound absorbing and inflammable fabric.



Base frame is a welded and leak proof container, preventing fluid leaks.




Depending on canopy type – one or more heavy-duty pull magnets for crane lifting – easily demountable.




Depending on canopy type – guide bars for forklift placed inside or beneath the base frame.



Reinforced connectors between the upper part of the canopy and the base frame. Optional removal of the selected parts of the canopy facilitates maintenance.
Cable inlets to the left or right side of the unit.

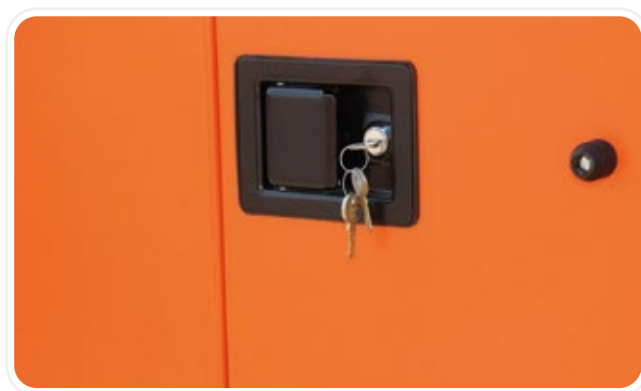

Each canopy is equipped with a maintenance door. One-key locks. Doors may be locked in open position for easier maintenance.

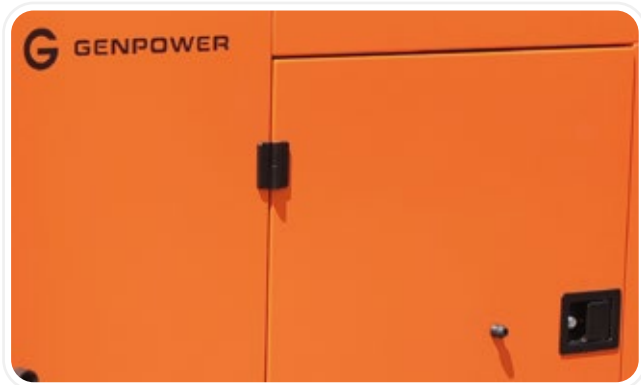

Stainless steel, powder coated and reinforced locks & hinges.



Fuel tank inlet allows unit refuelling without opening the doors.



DURABILITY

- New GENPOWER canopy made of zinc coated steel sheets 2-3 mm thick (Zintec)
- Powder coated in selected colour and structure
 - Edges of steel sheets curved inwards
- Frames and fuel tanks painted with chemo-resistant paint




SOUNDPROOFING

Canopy designed for generator soundproofing even in entry specifications. Significantly quieter in comparison to the competition. Soundproofed with a mineral wool, coated with inflammable fabric. Soundproofed air intakes. Hot air and exhaust fumes discharged through the top of canopy.




SECURITY

Reduced number of screws on the outside of canopy provides a better burglary protection. Base frame of the generator is a leak proof container stopping any fluid from polluting the environment. Purposely enlarged contour of the base frame. Retractable and burglar-proof handles with a safety-locks.

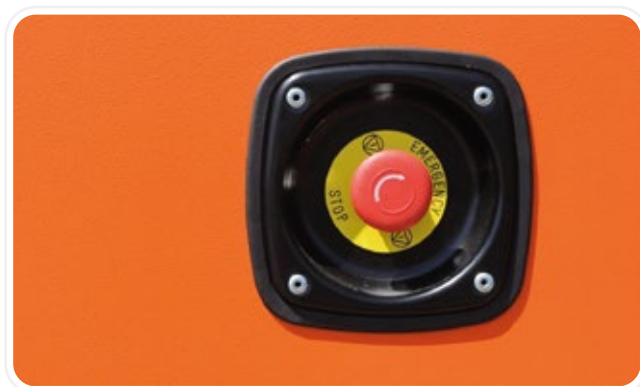

Well visible and approachable emergency STOP button.

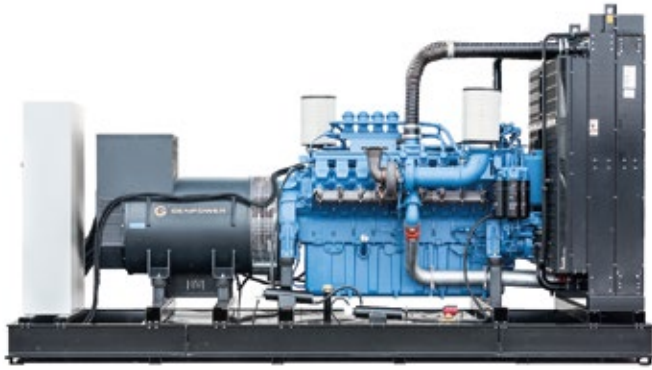

Each unit includes a standard exhaust silencer, accumulators paired with buffer battery charger, anti-freeze, engine oil and shock absorbers.



GENPOWER uses only original filters and production supplies recommended by world leaders in the production of engines and generators.



Each unit has warranty coverage for 12 – 60 months. Maintenance contract can guarantee required response time of service or rental at the time of repairs.



OPTIONAL SOLUTIONS

Additional fuel tanks, ventilation and fume exhaust systems, monitoring and various control and synchronization systems.



Power sets controllers and their functionality factors are selected in terms of customer requirements.



GENPOWER – POZNAŃ

Buszewo 33
62-045 Pniewy

Sales:

Tel: +48 (61) 641-6789
Fax: +48 (61) 666-02-60
GSM: +48 691-33-6789

Administration:

Tel: +48 (61) 666-02-51
Fax: +48 (61) 666-02-60
GSM: +48 500-176-001

GENPOWER – WARSZAWA

ul. Bartycka 116
00-716 Warszawa

Tel: +48 (22) 398-4789
Fax: +48 (61) 666-02-60
GSM: +48 506-460-099

GENPOWER – TORUŃ

ul. Szkolna 13
87-122 Grębocin (near Toruń)

Tel: +48 (56) 649-4789
Fax: +48 (61) 666-02-60
GSM: +48 603-222-789

GENPOWER – KATOWICE

Sales:

Tel: +48 (32) 70-09-789
Fax: +48 (61) 666-02-60
GSM: +48 691-331-221

WWW.GENPOWER.PL

